


Thyristor Surge Suppressor

Version: A5 2018-01-09

Features

- Excellent capability of absorbing transient surge
- Quick response to surge voltage (nS Level)
- Eliminates overvoltage caused by fast rising transients
- Moisture sensitivity level: level 1
- Weight 88 mg
- Non-degenerative
- Uni-directional



SMB-T

Application Information

- SLIC


Package (top view)



Agency Approvals

Icon	Description
RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003

Schematic Symbol

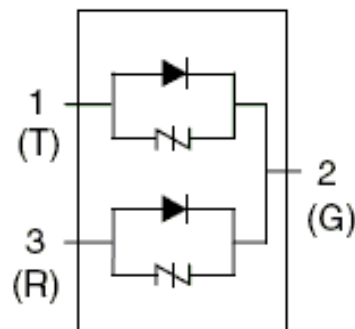

Part Number and Electrical Parameter

Part Number	IDRM@VDRM(PIN2-1, 3)		VS ^① @IS(PIN2-1, 3)		VT@IT(PIN2-1, 3)		VF@IF(PIN1, 3-2)		IH(PIN2-1, 3)	CO ^② (PIN2-1, 3)
	μA	V	V(MAX)	mA	V	A	V	mA	mA	pF
	MAX	Pin2 to1,3	Pin2 to1,3		MAX		MAX		MIN	MAX
BS1100N-2A1	5	95	130	800	4	2.2	1	10	120	100

Absolute maximum ratings measured at TA= 25°C RH = 45%-75% (unless otherwise noted).

①Vs is measured at 100KV/S

② Off-state Capacitance is measured at VDC=2V, VRMS=1V, f=1MHz

Part Numbering System

BS 1100 N - 2 A 1
(1) (2) (3) (4) (5) (6)

- (1) Bencent Semiconductor Surge Arrester
(2) Off state Voltage, e.g: 1100=110×10⁰=110V.
(3) Package: SMB-T
(4) 2 Lines Protection
(5) Rating Surge Voltage: 2KV (10/700μS)
(6) Polarity: Uni-directional


Mark



B11N2A1: Part Number
1710: October, 2017

V-I Curve

Parameters	Definition
V _{DRM}	Peak Off-state Voltage
I _{DRM}	Off-state Current
V _S	Switching Voltage
I _S	Switching Current
I _H	Holding Current
V _T	On-state Voltage
I _T	On-state Current
V _F	Forward on-state voltage
I _F	Forward current
C _O	Off-state Capacitance

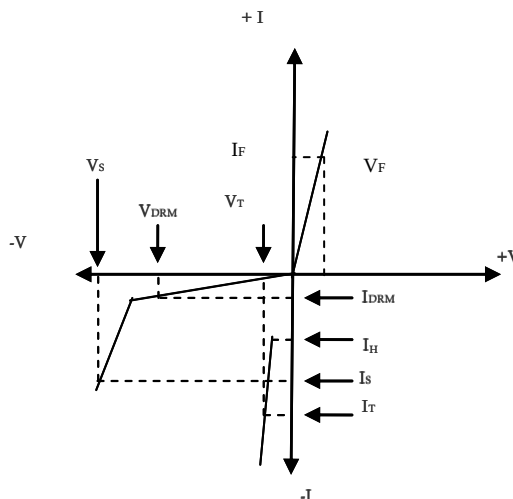

Surge Ratings

Current Waveform	5/320μs*	8/20μs	10/1000μs
Voltage Waveform	10/700μs*	1.2/50μs	10/1000μs
I _{pp}	50A	300A	35A

-Peak pulse current rating (I_{pp}) is repetitive and guaranteed for the life of the product;

-Bencent makes the test for 5/320μs@50A* (10/700μs@2KV), 8/20μs@ 300A (1.2/50μs@600V), but for other IPP value derived from experience is just for reference only. Bencent will not take any obligation for these parameters, so before applying our parts, please make sure to verify the parameters listed in the above table.

Thermal Considerations

Symbol	Parameter	Value	Unit
T _J	Operating Junction Temperature Range	-40 to +150	°C
T _S	Storage Temperature Range	-60 to +150	°C

Physical Characteristics

Lead Material	Copper Alloy
Body Material	UL recognized epoxy meeting flammability classification 94V-0
Terminal Finish	100% Matte-Tin Plated

Thyristor Surge Suppressor


Version: A5 2018-01-09

Environmental Characteristics

Testing Items	Technical Standards
High Temperature Reverse Bias Test	Temperature: $150\pm 3^{\circ}\text{C}$, Bias= $80\%V_{\text{DRM}}$ Time: 168H
High Temperature Life Test	Temperature: 150°C Time: 168H
High-low Temperature Cycle Test	Temperature: From -40°C to 125°C Dwell time: 30min, 10-100 cycles
High Temperature & High Humidity Test	Temperature: 85°C Humidity: 85% Test time: 168H
Pressure Cooker Test	Temperature: 121°C , 2atm. Humidity: 100% Test time: 24H to 168H
Resistance of Soldering Heat	Temperature: $260\pm 5^{\circ}\text{C}$ Time of dip soldering: 10s, 3times


Note: The above testing items can be specified by customers by contacting Bencent service

Product Dimensions

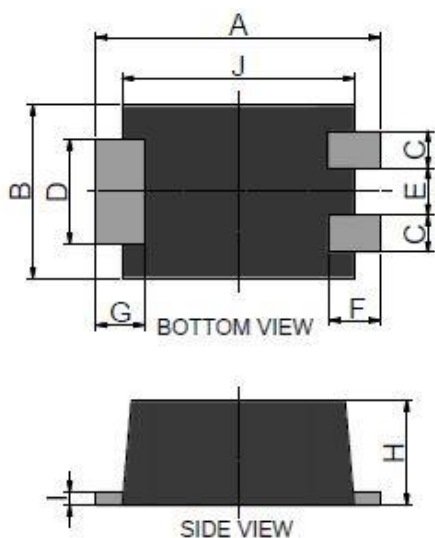

REF	mm	inch
A	5.4 ± 0.3	0.213 ± 0.012
B	3.3 ± 0.3	0.130 ± 0.012
C	0.7 ± 0.1	0.028 ± 0.004
D	2.0 ± 0.2	0.079 ± 0.008
E	0.9 ± 0.2	0.035 ± 0.008
F	0.8 ± 0.25	0.031 ± 0.010
G	0.9 ± 0.25	0.035 ± 0.010
H	2 ± 0.3	0.079 ± 0.012
I	0.25 ± 0.05	0.010 ± 0.002
J	4.4 ± 0.2	0.173 ± 0.008

Recommended Soldering Pad

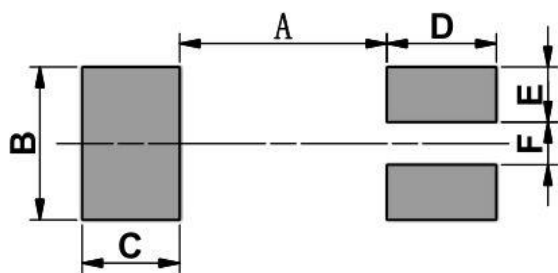


REF	mm	inch
A	3.2	0.126
B	2.5	0.098
C	1.6	0.063
D	1.4	0.055
E	0.9	0.035
F	0.7	0.028

Thyristor Surge Suppressor


Version: A5 2018-01-09

Reflow Profile

Reflow Condition		Pb-Free Assembly
Pre Heat	Temperature Min.	+150°C
	Temperature Max.	+200°C
	Time (Min to Max)	60 – 180 secs.
Average ramp up rate (Liquidus Temp(T_L) to peak)		3°C/sec. Max.
T_S (max) to T_L - Ramp-up Rate		3°C/sec. Max.
Reflow	- Temperature (T_L) (Liquidus)	+217°C
	- Temperature (T_L)	60 – 150 secs.
Peak Temp (T_P)		+(260+0/-5)°C
Time within 5°C of actual Peak Temp (T_P)		25secs.
Ramp-down Rate		6°C/sec. Max.
Time 25°C to peak Temp (T_P)		8 min. Max.
Do not exceed		+260°C

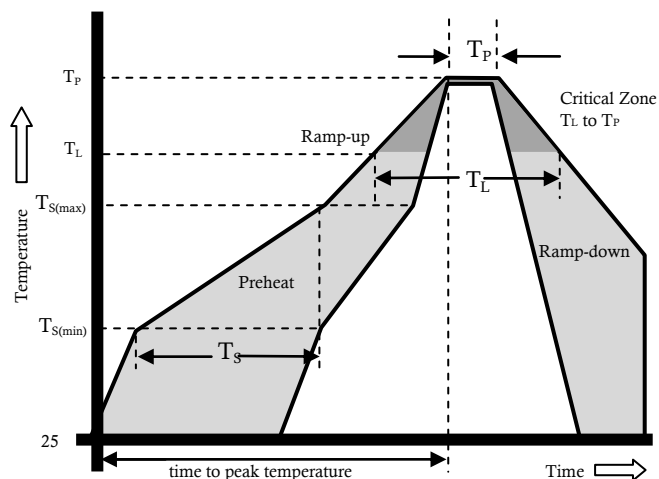

Package Reel Information

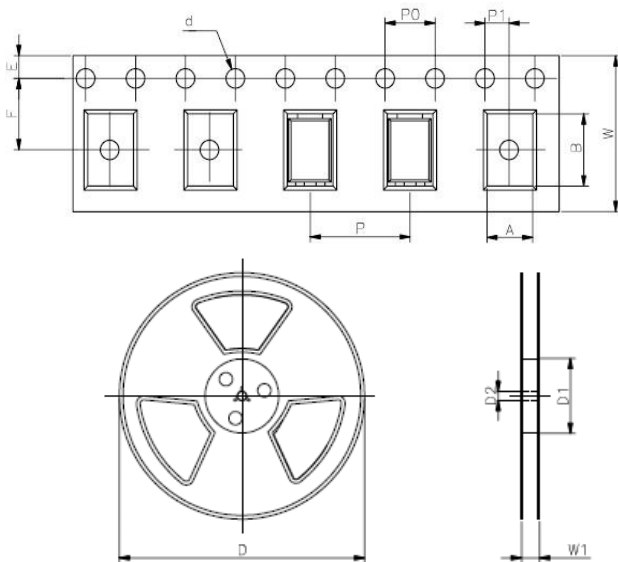

REF	mm	inch
A	3.9±0.2	0.154±0.008
B	5.8±0.2	0.228±0.008
d	1.5±0.1	0.059±0.004
D	330±2	13±0.079
D1	100±2	3.937±0.079
D2	13±0.5	0.512±0.02
E	1.75±0.2	0.069±0.008
F	5.5±0.25	0.217±0.01
P	8.0±0.2	0.315±0.008
P0	4.0±0.2	0.157±0.008
P1	2.0±0.2	0.079±0.008
W	12±0.2	0.472±0.008
W1	12.5+2/-0.5	0.492+0.079/-0.020

Outline	Reel (pcs)	Per Carton (pcs)	Reel Diameters (mm)	Carton Size(mm)		
				L	W	H
Taping	3,000	48,000	330	360	360	385