


Features

- Size Design $41 \times 30.5 \times 27.2$ (± 0.5) mm
- High Current Handling Capability 20kA @ 8/20 μ s
- Fast Response and Long Service Life
- Reliable to Protect Surge Voltage
- Possess SPD Disconnection
- Impulse Test Classification: class II tests or class III tests


Exterior

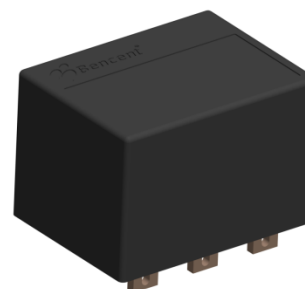


Application information

- Single-phase AC Power


Package (Top View)

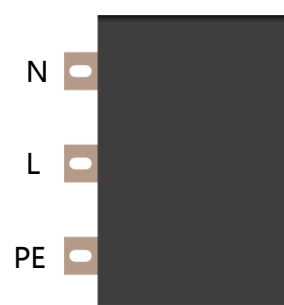

Agency Approvals


Icon	Description
RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003
	Mean lead free

Schematics

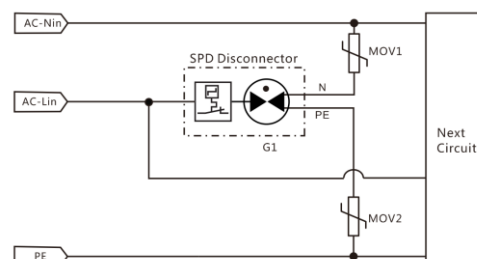


Test Method


1. Test Ability Executive standard: IEC 61643-11: 2011, GB 18802.1-2011.
2. Test Port: L-N, L-PE, N-PE.
3. Three groups of five impulses of 8/20 current impulses with positive polarity shall be applied. Each impulse shall be synchronized to the power frequency. The test samples are connected to U_c . Starting from 0° the synchronization angle shall be increased in steps of 30° with a tolerance of $\pm 5^\circ$ for each synchronization angle. The tests are described in Figure.
4. The interval between the impulses is 50 s – 60 s, the interval between the groups is 25 min – 35 min.

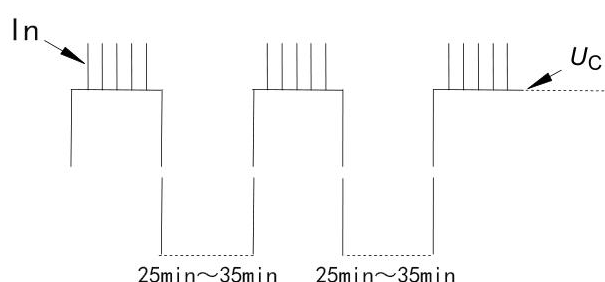


SPD Disconnecter

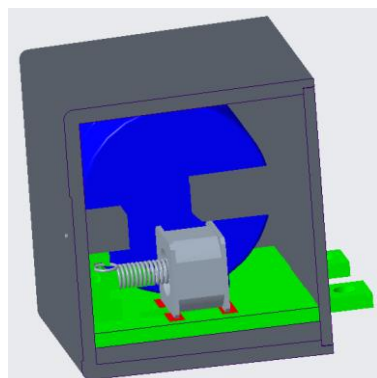

SPD Normal State

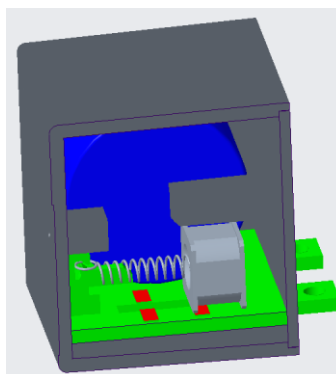

SPD Failure State

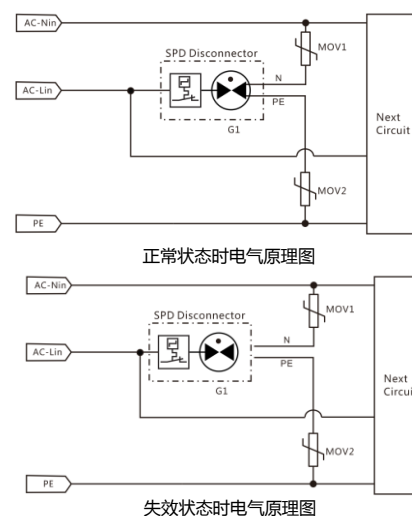

Electrical Parameter

Rated operating voltage U_n	220	V
Maximum continuous operating voltage $U_c^{1)2)}$	250	V
Nominal discharge current $I_n (8/20\mu s)^{3)}$	20	kA
(L-PE/L-N) Voltage protection level $U_p (8/20\mu s)^{3)}$	1.5	kV
(N-PE) Voltage protection level $U_p (8/20\mu s)^{3)}$	2.5	kV
Combination wave $U_{oc} (1.2/50\mu s @ 8/20\mu s)^{3)}$	20@10	kV@kA
Operating and storage Temperature	-40 ~ +85	°C
Modes of protection	L-N、L-PE、N-PE	/
IP Code	IP20	/
Housing material ³⁾	UL94 V0	/
Weight	45.5	g

1) At delivery AQL 0.65 level II GB/T 2828.1-2003

2) In ionized mode

3) Terms and current waveforms in accordance with GB18802.1-2011, IEC 61643-11: 2011.

Part Numbering System

B SPD 220 C 20 P
(1) (2) (3) (4) (5) (6)

(1) Bencent

(2) SPD Surge Protective Device

(3) Nominal Voltage: 220VAC

(4) SPD Classification: C

(5) Nominal Discharge Current: 20kA

(6) P Surge Protective Device Installed on PCB

Product Characteristics

Lead Material	PCB
Body Material	PC、Ceramics、Epoxy、Metal
Terminal Finish	Copper Tin Plated

Environmental Reliability Characteristics


Testing items	Technical standards
High Temperature Storage Test	Temperature: 85℃ Time: 2H
Low Temperature Storage Test	Temperature: -45℃ Time: 2H
Thermal Shock	Temperature: -45--85℃ Cycle: 5
Vibration	Frequency: 10Hz~55Hz Acceleration: 20m/s ² (2g) Direction of vibration: x/y/z Time: 30min
Resistance of soldering heat	Temperature: 260±5℃ Time of dip soldering: 10s, 1time

Note: Up-screen program can be specified by customer's request via contacting Bencent service


Solderability test

Solderability	Solder Pot Temperature:	245℃ ±5℃
	Solder Dwell Time:	4-6 seconds

Product Dimensions

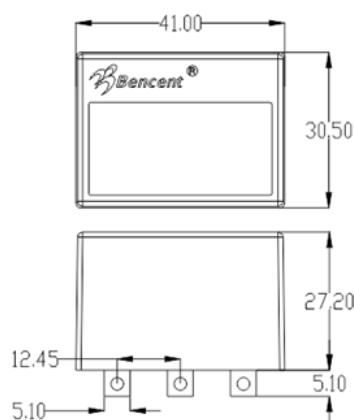


PCB Top Drilling Layer


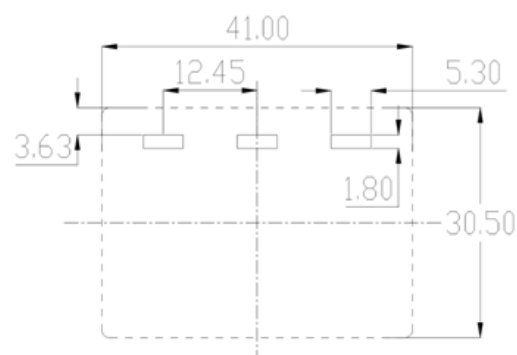


Wave Soldering profile

Wave Soldering Condition		Pb-Free assembly
Pre Heat	Temperature Min	100℃
	Temperature Max	150℃
	Time (min to max)	60 – 180 secs
Solder Pot Temperature		270℃ Max
Solder Dwell Time		2-5 seconds

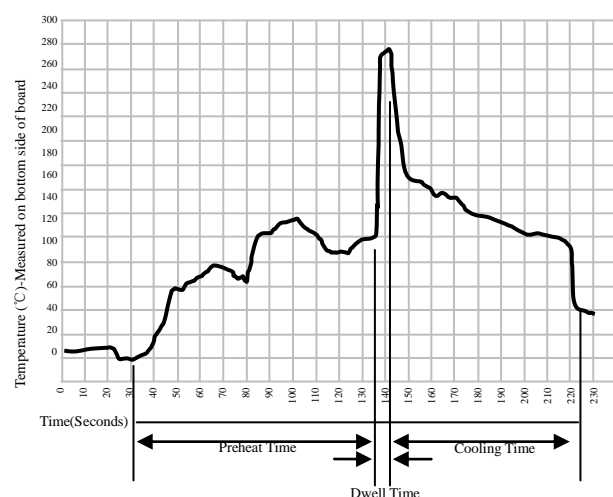

Package Information

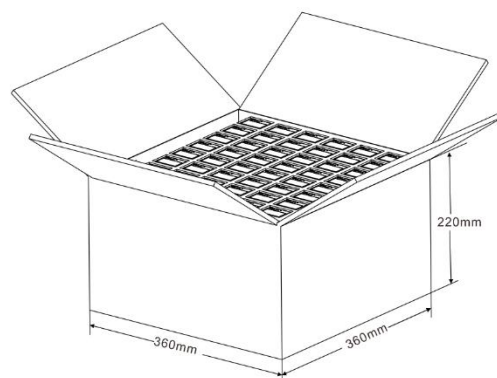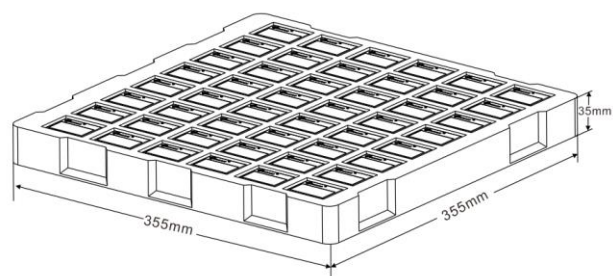

Outline	Per Dish (PCS)	Per Carton (PCS)	Carton Size(mm)		
			L	W	H
Skin packing	48	288	360	360	220