

Transient Voltage Suppressor

Version: A3 2023-07-25

Features

- IEC 61000-4-2(ESD)±30KV(air), ±30KV(contact)
- IEC61000-4-5(Lightning) 7A (8/20μS)
- IEC61000-4-4(EFT) 40A (5/50nS)
- 70 Watts peak pulse power (tp=8/20μS)
- Low clamping voltage
- Weight approx. 0.5 mg
- Small package: DFN1006
- Moisture sensitivity level: Level 1

Exterior



DFN1006

Application information

- 1.8v power, Signal port
- Cell Phone Handsets and Accessories
- Microprocessor based equipment
- Personal Digital Assistants (PDA's)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Peripherals, Pagers


Package (top view)



Agency Approvals

Icon	Description
RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003
	Mean lead free

Schematic



Part Number and Electrical Parameter

Part Number	I _{DRM} @V _{DRM}		V _{BR} ^① @I _R		V _C @I _{pp} ^②		V _C @I _{pp} ^②		R _{DYN} @ TLP ^③	V _C @I _{pp} TLP ^③		Co ^④
	μA	V	V	mA	V	A	V	A	Ω	V	A	pF
	MAX		MIN		MAX		MAX		TYP	TYP		TYP
BV-FA03ZCB	1	3.3	3.5	1	6	1	10	7	0.23	8.8	16	12

Absolute maximum ratings measured at T= 25°C RH = 45%-75% (unless otherwise noted).

① V_{BR} is measured at I_R=1mA

② Surge Waveform: 8/20μS.

③ TLP parameter: Z₀ = 50Ω, tp = 100ns, tr = 1ns, R_{DYN} is calculated from 4A to16A

④ Off-state capacitance is measured in V_{DC}=0V,V_{RMS}=0.3V,f=1MHz

Transient Voltage Suppressor

Part Numbering System

Mark

BV FA 03 Z C B
(1) (2) (3) (4) (5) (6)


- (1) Bencent Transient Voltage Suppressor
- (2) Package: DFN1006
- (3) Off-state Voltage: 3.3V
- (4) Normal Capacitance
- (5) Bidirectional
- (6) Bencent internal code



T: Part Number


V-I Curve

Parameters	Definition
VC	Clamping voltage
Ipp	Surge waveform 8/20μs
VDRM	Stand-off Voltage
VBR	Breakdown Voltage
IDRM	Reverse Leakage Current
IR	Test current
PPP	Peak Pulse Power Dissipation

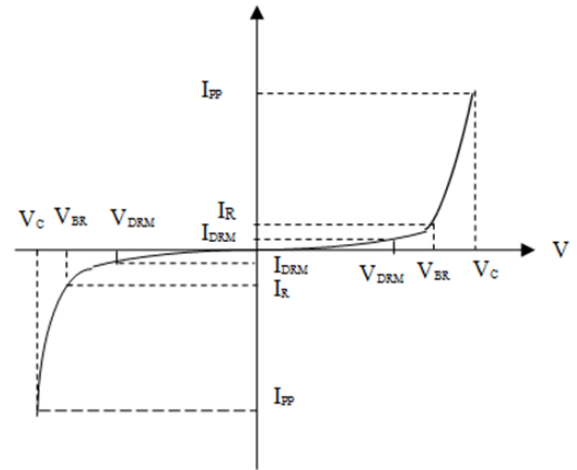


Typical Characteristics

Power Derating

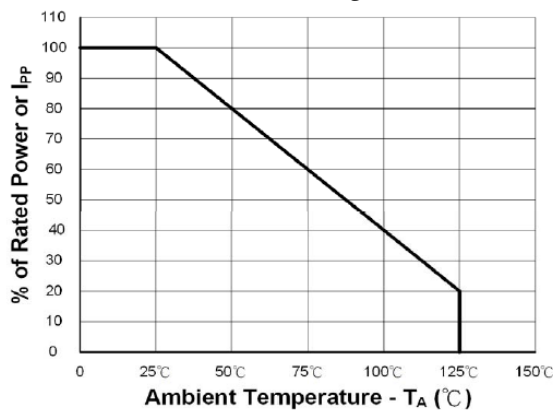


Clamping Voltage Vs. Peak PULSE CURRENT

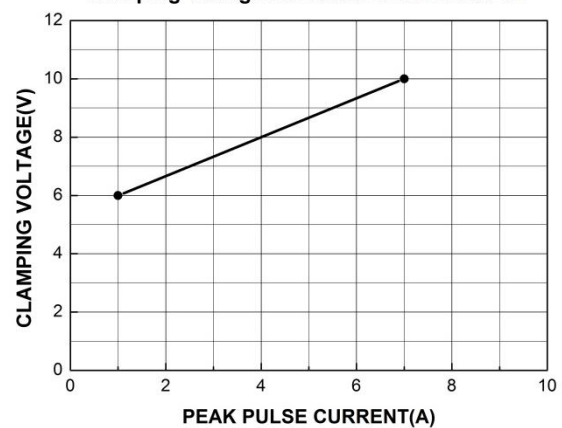

Transient Voltage Suppressor

Version: A3 2023-07-25

TLP IV curve

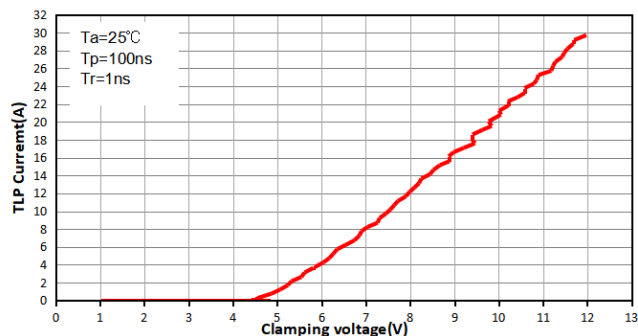

Thermal Considerations


symbol	Parameter	Value	Unit
T_J	Operating Junction Temperature Range	-40 to +125	$^\circ\text{C}$
T_S	Storage Temperature Range	-55 to +150	$^\circ\text{C}$

Environmental Characteristics

Testing items	Technical standards
High temperature Reverse Bias Test	Temperature: $125 \pm 3^\circ\text{C}$ Bias= $80\%V_{\text{DRM}}$ Time:168H
High Temperature Life Test	Temperature: 150°C Time:168H
High-low Temperature Cycle test	Temperature: From -40°C to 125°C Dwell time : 30min,10cycles
High Temperature &High Humidity Test	Temperature: 85°C Humidity:85% Time:168H
Pressure cooker Test	Temperature: 121°C , 2atm. Humidity:100% Time:24H
Resistance of soldering heat	Temperature: $260 \pm 5^\circ\text{C}$ Time of dip soldering: 10s, 3times

Note: The above testing items can be specified by customer's special request

Product Dimensions

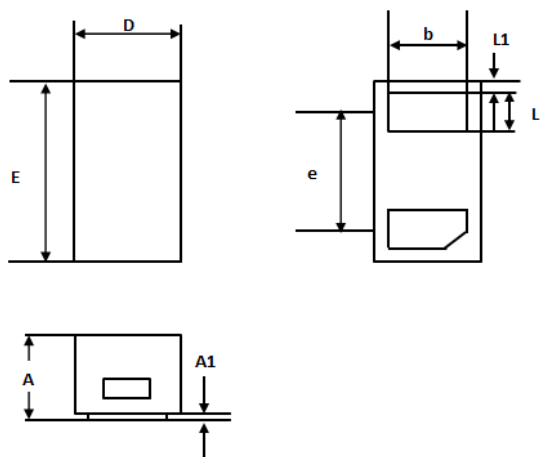


REF	mm	inch
A	0.45~0.55	0.018~0.022
A1	0.00~0.05	0.000~0.002
D	0.55~0.65	0.022~0.026
E	0.95~1.05	0.037~0.041
b	0.40~0.60	0.016~0.024
e	0.65BSC	0.026BSC
L	0.15~0.35	0.006~0.014
L1	0.05REF	0.002REF

Transient Voltage Suppressor

Version: A3 2023-07-25


Recommended Soldering Pad

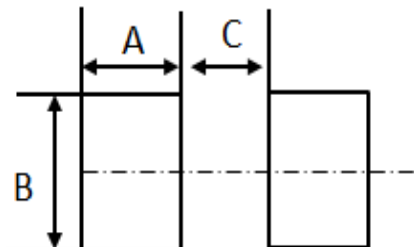

REF	mm	inch
A	0.35	0.014
B	0.60	0.024
C	0.35	0.014

Reflow Profile


Reflow Condition		Pb-Free assembly
Pre Heat	Temperature Min	150°C
	Temperature Max	200°C
	Time (min to max)	60 – 180 secs
Average ramp up rate (Liquid) T _{amp} (T _L) to peak		3°C/s max
T _S (max) to T _L - Ramp-up Rate		3°C/s max
Reflow	- Temperature (T _L) (Liquid)	217°C
	- Temperature (T _L)	60 – 150 secs
Peak Temperature (T _P)		260±0/-5 °C
Time within 5°C of actual peak Temperature (T _P)		30secs
Ramp-down Rate		6°C/s max
Time 25°C to peak Temperature (T _P)		8 mins max.
Do not exceed		260°C

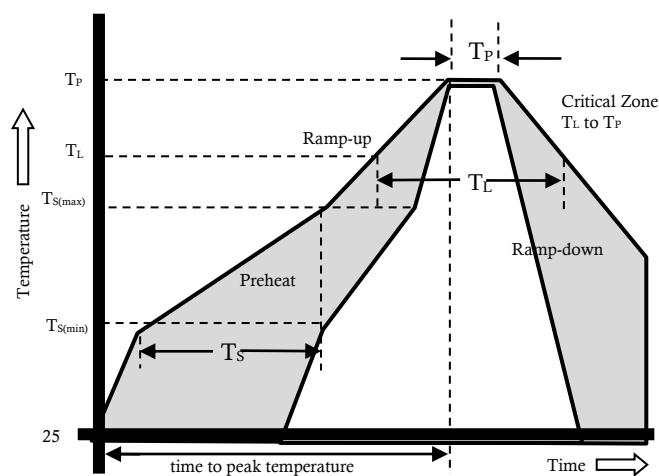

Transient Voltage Suppressor

Version: A3 2023-07-25

Package Reel Information

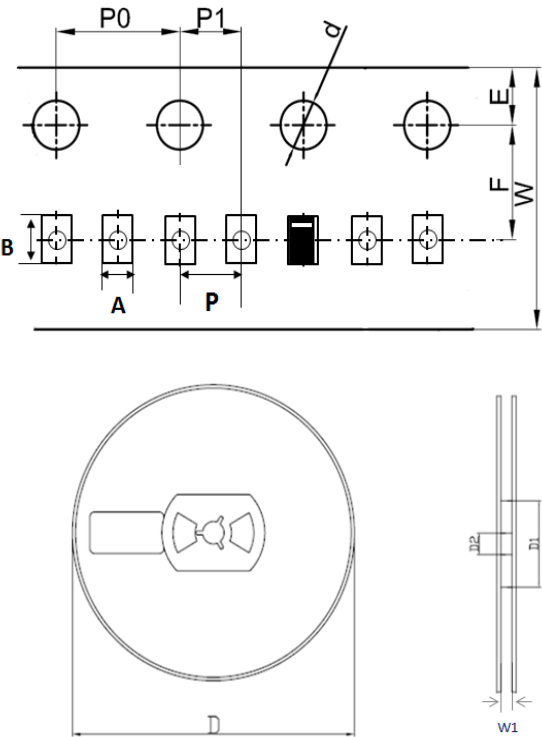

REF	mm	inch
A	0.70+/-0.05	0.028+/-0.002
B	1.15+/-0.05	0.045+/-0.002
d	1.50+0.1/-0	0.059+0.004/-0
D	178.00+/-2.00	7.008+/-0.079
D1	55.00+/-3.00	2.165+/-0.118
D2	13.00+/-0.50	0.512+/-0.020
E	1.75+/-0.10	0.069+/-0.004
F	3.50+/-0.20	0.138+/-0.008
P	2.00+/-0.20	0.079+/-0.008
P0	4.00+/-0.20	0.157+/-0.008
P1	2.00+/-0.20	0.079+/-0.008
W	8.00+/-0.20	0.315+/-0.008
W1	9.50+/-1.00	0.374+/-0.039

OUTLINE	REEL (PCS)	PER CARTON (PCS)	REEL DIAMETERS (mm)	CARTON SIZE(mm)		
				L	W	H
TAPING	10,000	300,000	178	390	370	220