

## Transient Voltage Suppressor

Version: A3 2023-07-26

### Features

- IEC 61000-4-2(ESD)  $\pm 30\text{KV}(\text{air})$ ,  $\pm 30\text{KV}(\text{contact})$
- IEC61000-4-5(Lightning) 7A (8/20 $\mu\text{S}$ )
- 70Watts peak pulse power ( $t_p=8/20\mu\text{S}$ )
- Low operating voltage and low clamping
- Small package:DFN1006

### Exterior



DFN1006

### Application information

- Cell Phone
- PDA
- Notebook
- Digital Cameras
- Portable Instrumentation
- Audio and video equipment


### Package (top view)



### Agency Approvals

| Icon                                                                                | Description                        |
|-------------------------------------------------------------------------------------|------------------------------------|
| <b>RoHS</b>                                                                         | Compliance with 2011/65/EU         |
| <b>HF</b>                                                                           | Compliance with IEC61249-2-21:2003 |
|  | Mean lead free                     |

### Schematic Symbol



### Part Number and Electrical Parameter

| Part Number | $I_{\text{DRM}}@V_{\text{DRM}}$ |     | $V_{\text{BR}}^{①}@I_{\text{R}}$ |    | $V_{\text{C}}@I_{\text{PP}}^{②}$ |   | $V_{\text{C}}@I_{\text{PP}}^{②}$ |   | $R_{\text{DYN}}@ \text{TLP}^{③}$ | $V_{\text{C}}@I_{\text{PP}}@ \text{TLP}^{③}$ |    | $\text{Co}^{④}$ |     |
|-------------|---------------------------------|-----|----------------------------------|----|----------------------------------|---|----------------------------------|---|----------------------------------|----------------------------------------------|----|-----------------|-----|
|             | $\mu\text{A}$                   | V   | V                                | mA | V                                | A | V                                | A | $\Omega$                         | V                                            | A  | pF              |     |
|             | MAX                             |     | MIN                              |    | MAX                              |   | MAX                              |   | TYP                              | TYP                                          |    | TYP             | MAX |
| BV-FA03ZCT  | 0.1                             | 3.3 | 3.5                              | 1  | 7                                | 1 | 10                               | 7 | 0.16                             | 8.4                                          | 16 | 15              | 18  |

Absolute maximum ratings measured at  $T = 25^{\circ}\text{C}$  RH = 45%-75% (unless otherwise noted).

①  $V_{\text{BR}}$  is measured at  $I_{\text{R}}=1\text{mA}$

② Surge Waveform: 8/20 $\mu\text{S}$ .

③ TLP parameter:  $Z_0 = 50\Omega$ ,  $t_p = 100\text{ns}$ ,  $t_r = 1\text{ns}$ ,  $R_{\text{DYN}}$  is calculated from 4A to 16A

④ Off-state capacitance is measured in  $V_{\text{DC}}=0\text{V}$ ,  $V_{\text{RMS}}=300\text{mV}$ ,  $f=1\text{MHz}$

## Transient Voltage Suppressor

Version: A3 2023-07-26

### Part Numbering System

### Mark


BV FA 03 Z C T  
(1) (2) (3) (4) (5) (6)

- (1) Bencent Transient Voltage Suppressor
- (2) Package: DFN1006
- (3) Stand-off Voltage: 3.3V
- (4) Normal Capacitance
- (5) Bidirectional
- (5) Bencent internal code

3 A

### V-I Curve



| Parameters | Definition                   |
|------------|------------------------------|
| $V_C$      | Clamping voltage             |
| $I_{PP}$   | Surge waveform 8/20us        |
| $V_{DRM}$  | Stand-off Voltage            |
| $V_{BR}$   | Breakdown Voltage            |
| $I_{DRM}$  | Reverse Leakage Current      |
| $I_R$      | Test current                 |
| $V_{SB}$   | Snapback voltage             |
| $I_{SB}$   | Test current                 |
| $P_{pp}$   | Peak Pulse Power Dissipation |

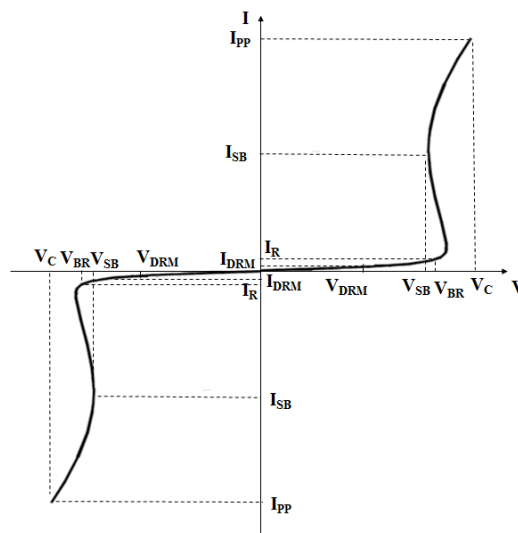

### Thermal Considerations

| symbol | Parameter                            | Value       | Unit |
|--------|--------------------------------------|-------------|------|
| $T_J$  | Operating Junction Temperature Range | -40 to +150 | °C   |
| $T_S$  | Storage Temperature Range            | -40 to +150 | °C   |


### Typical Characteristics

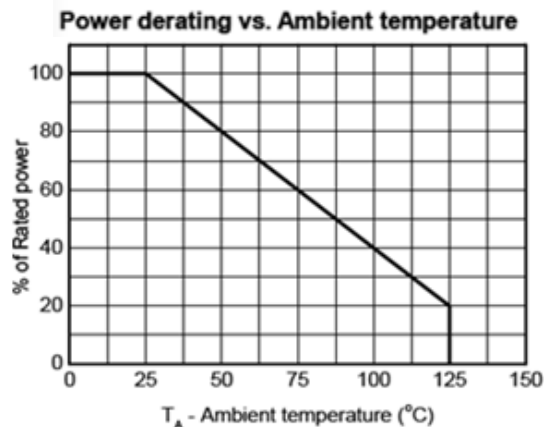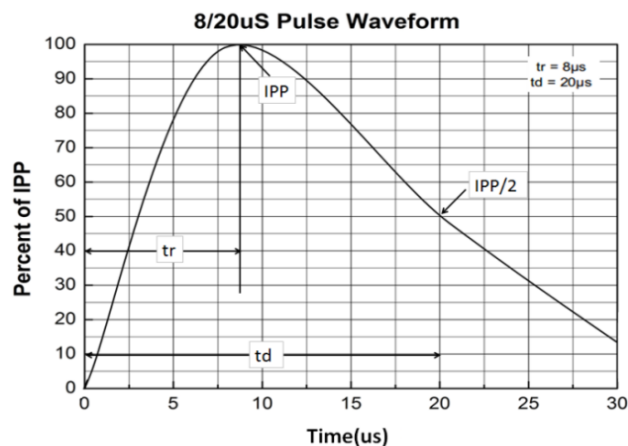

## Transient Voltage Suppressor

Version: A3 2023-07-26

### TLP IV curve

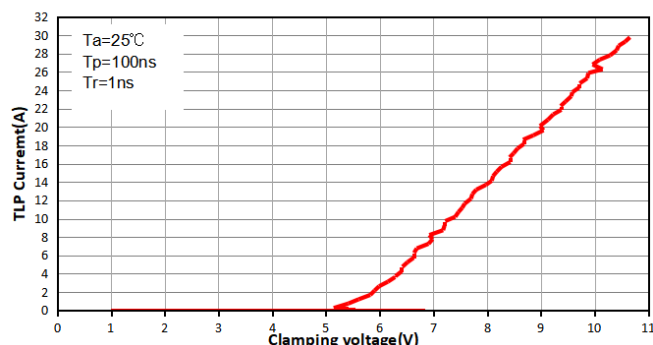


## Environmental Characteristics

| Testing items                        | Technical standards                                           |
|--------------------------------------|---------------------------------------------------------------|
| High temperature Reverse Bias Test   | Temperature: 150±3℃ Bias=80%V <sub>DRM</sub><br>Time:168H     |
| High Temperature Life Test           | Temperature: 150℃<br>Time:168H                                |
| High-low Temperature Cycle test      | Temperature: From -40℃ to125℃<br>Dwell time : 30min,100cycles |
| High Temperature &High Humidity Test | Temperature: 85℃Humidity:85%<br>Time:168H                     |
| Pressure cooker Test                 | Temperature: 121℃ , 2atm. Humidity:100%<br>Time:24H           |
| Resistance of soldering heat         | Temperature: 260±5℃<br>Time of dip soldering: 10s, 3times     |

Note: The above testing items can be specified by customer's special request.

## Product Dimensions

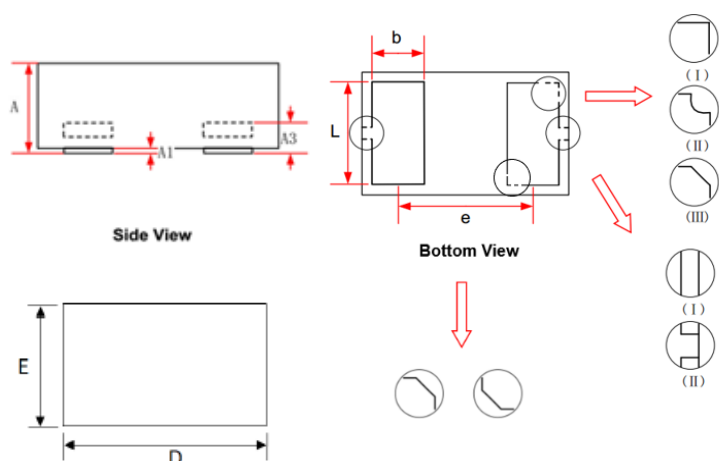


| REF | mm        | inch        |
|-----|-----------|-------------|
| A   | 0.35~0.55 | 0.014~0.022 |
| A1  | 0.00~0.05 | 0.000~0.002 |
| A3  | 0.125REF  | 0.005REF    |
| D   | 0.95~1.10 | 0.037~0.043 |
| E   | 0.55~0.70 | 0.022~0.028 |
| L   | 0.45~0.55 | 0.018~0.022 |
| e   | 0.65BSC   | 0.026BSC    |
| b   | 0.15~0.35 | 0.006~0.014 |

## Transient Voltage Suppressor

Version: A3 2023-07-26

### Recommended Soldering Pad

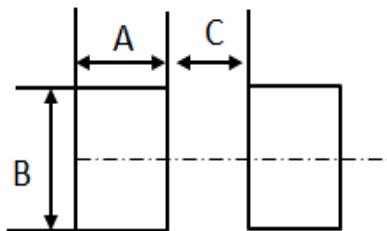


| REF | mm   | inch  |
|-----|------|-------|
| A   | 0.35 | 0.014 |
| B   | 0.60 | 0.024 |
| C   | 0.35 | 0.014 |

#### Notes:


This recommended land pattern is for reference purposes only. Please consult your manufacturing group to ensure your PCB design guidelines are met

### Reflow Profile

| Reflow Condition                                                         |                                          | Pb-Free assembly |
|--------------------------------------------------------------------------|------------------------------------------|------------------|
| Pre Heat                                                                 | Temperature Min                          | 150°C            |
|                                                                          | Temperature Max                          | 200°C            |
|                                                                          | Time (min to max)                        | 60 – 180 secs    |
| Average ramp up rate (Liquid) T <sub>amp</sub> (T <sub>L</sub> ) to peak |                                          | 3°C/s max        |
| T <sub>S</sub> (max) to T <sub>L</sub> - Ramp-up Rate                    |                                          | 3°C/s max        |
| Reflow                                                                   | - Temperature (T <sub>L</sub> ) (Liquid) | 217°C            |
|                                                                          | - Temperature (T <sub>L</sub> )          | 60 – 150 secs    |
| Peak Temperature (T <sub>P</sub> )                                       |                                          | 260+0/-5 °C      |
| Time within 5°C of actual peak Temperature (T <sub>P</sub> )             |                                          | 30secs           |
| Ramp-down Rate                                                           |                                          | 6°C/s max        |
| Time 25°C to peak Temperature (T <sub>P</sub> )                          |                                          | 8 mins max.      |
| Do not exceed                                                            |                                          | 260°C            |

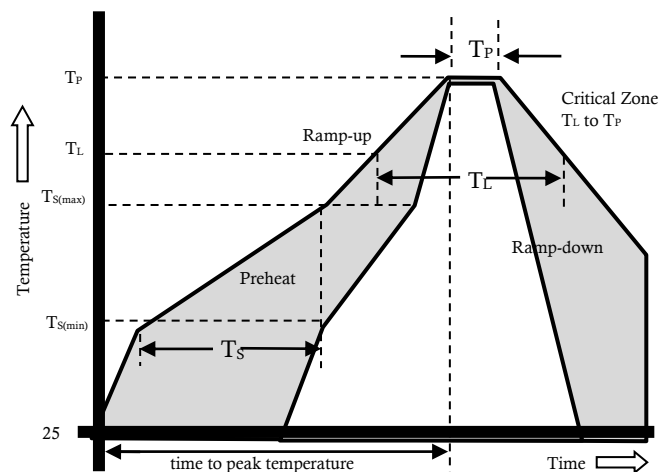

Package Reel Information

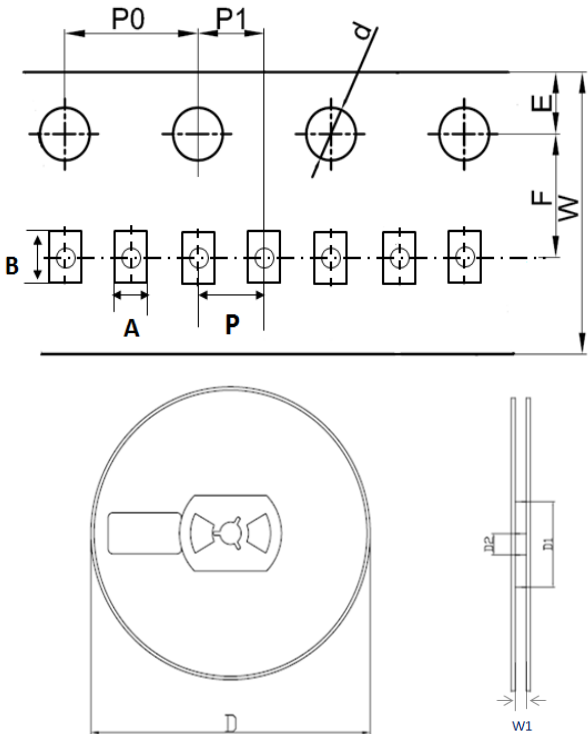

| REF | mm            | inch          |
|-----|---------------|---------------|
| A   | 0.65+/-0.10   | 0.026+/-0.004 |
| B   | 1.20+/-0.1    | 0.047+/-0.004 |
| d   | 1.50+/-0.1    | 0.059+/-0.004 |
| D   | 178.00+/-2.00 | 7.008+/-0.079 |
| D1  | 55.00+/-3.00  | 2.165+/-0.118 |
| D2  | 13.00+/-0.50  | 0.512+/-0.020 |
| E   | 1.75+/-0.10   | 0.069+/-0.004 |
| F   | 3.50+/-0.20   | 0.138+/-0.008 |
| P   | 2.00+/-0.20   | 0.079+/-0.008 |
| P0  | 4.00+/-0.20   | 0.157+/-0.008 |
| P1  | 2.00+/-0.20   | 0.079+/-0.008 |
| W   | 8.00+/-0.30   | 0.315+/-0.012 |
| W1  | 9.50+/-1.00   | 0.374+/-0.039 |

| OUTLINE | REEL<br>(PCS) | PER CARTON<br>(PCS) | REEL<br>DIAMETERS<br>(mm) | CARTON SIZE(mm) |     |     |
|---------|---------------|---------------------|---------------------------|-----------------|-----|-----|
|         |               |                     |                           | L               | W   | H   |
| TAPING  | 10,000        | 300,000             | 178                       | 390             | 370 | 220 |