

Transient Voltage Suppressor

Version: A1 2023-11-30

Features

- IEC 61000-4-2 (ESD) $\pm 30\text{KV}$ (air), $\pm 30\text{KV}$ (contact)
- IEC61000-4-4(EFT): 40A (5/50ns)
- IEC61000-4-5(surge): 6A (8/20 μs)
- 140Watts peak pulse power (tp=8/20 μs)
- Small package: DFN1006-2L

Exterior



DFN1006-2L

Application Information

- Cellular handsets
- Tablets
- Other portable devices


Package (top view)



Agency Approvals

Icon	Description
RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003
	Mean lead free

Schematic(top view)



Part Number and Electrical Parameter

Part Number	$I_{\text{DRM}}@V_{\text{DRM}}$		$V_{\text{BR}}^{\text{①}}@I_{\text{R}}$		$V_{\text{c}}@I_{\text{pp}}^{\text{②}}$		$V_{\text{c}}@I_{\text{pp}}^{\text{②}}$		$\text{CO}^{\text{③}}$	
	μA	V	V	mA	V	A	V	A	pF	
	MAX		MIN		MAX		MAX		TYP	MAX
BV-FA15ZCB	0.1	15	15.5	1	20	1	25	6	5	10

Part Number	$V_{\text{SB}}^{\text{④}}@I_{\text{SB}}$		$R_{\text{DYN}}@$ $\text{TLP}^{\text{④}}$	$V_{\text{c}}@I_{\text{pp}} \text{ TLP}^{\text{④}}$		ESD Contact mode ^⑤	
	V	mA	Ω	V	A	V	KV
	MIN		TYP	TYP		TYP	
BV-FA15ZCB	15.5	50	0.35	21	16	21	8

Absolute maximum ratings measured at T= 25°C RH = 45%-75% (unless otherwise noted).

① I_{DRM} is measured at $V_{\text{DRM}}=15\text{V}$; V_{BR} is measured at $I_{\text{R}}=1\text{mA}$; V_{SB} is measured at $I_{\text{SB}}=50\text{mA}$

② Surge Waveform: 8/20 μs , pin 1 to pin2 and pin2 to pin1

③ Off-state capacitance is measured in $V_{\text{DC}}=0\text{V}$, f=1MHz

④ TLP parameter: $Z_0 = 50\Omega$, tp = 100ns, tr = 2ns, RDYN is calculated from 4A to 16A.

⑤ Contact discharge mode, according to IEC61000-4-2.

Transient Voltage Suppressor

Version: A1 2023-11-30

Part Numbering System

Mark


BV FA 15 Z C B
(1) (2) (3) (4) (5) (6)





- (1) Bencent Transient Voltage Suppressor
- (2) Package:DFN1006-2L
- (3) Off-state Voltage: 15V
- (4) Normal Capacitance
- (5) Bi-directional
- (6) Bencent internal code


V-I Curve

Parameters	Definition
V_C	Clamping voltage
I_{PP}	Surge waveform 8/20 μ s
V_{DRM}	Stand-off Voltage
V_{BR}	Breakdown Voltage
I_{DRM}	Reverse Leakage Current
I_R	Test current
V_{SB}	Snapback Voltage
I_{SB}	Test current
P_{PP}	Peak Pulse Power Dissipation

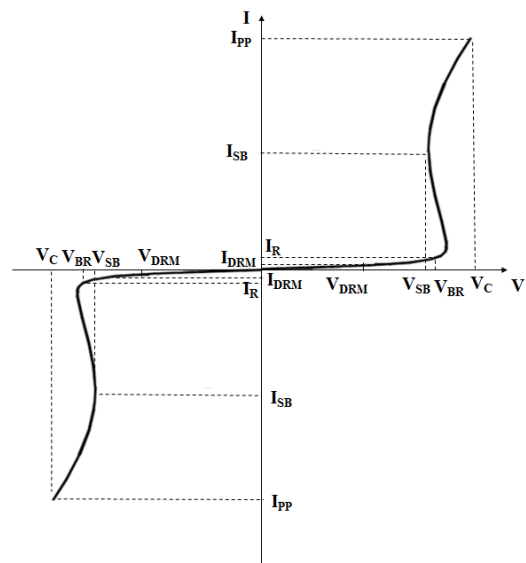


Typical Characteristics

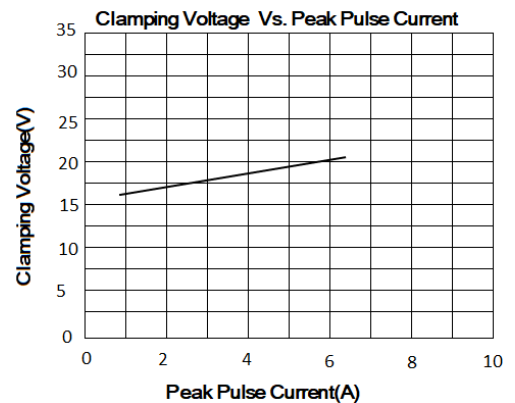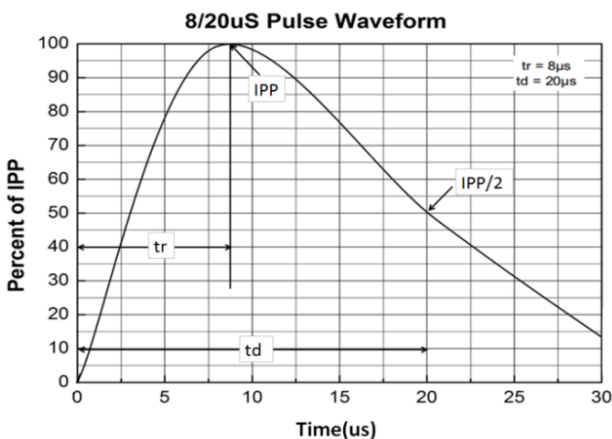


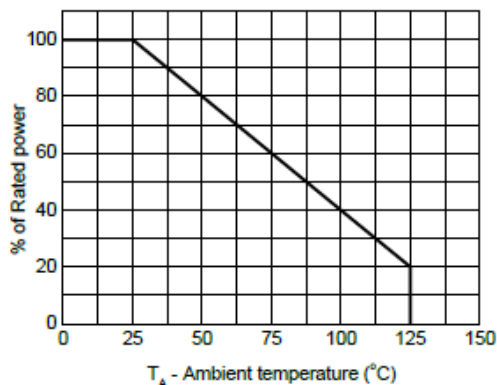


Power derating vs. Ambient temperature

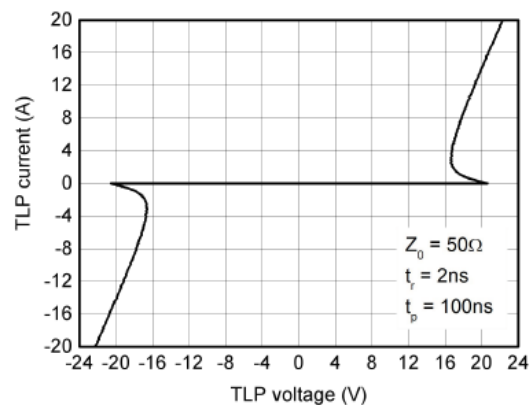

TLP Measurement

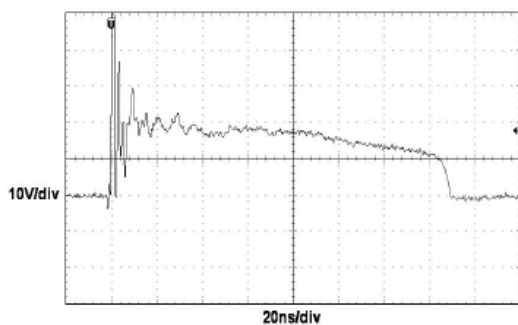

ESD clamping
(+8kV contact discharge per IEC61000-4-2)

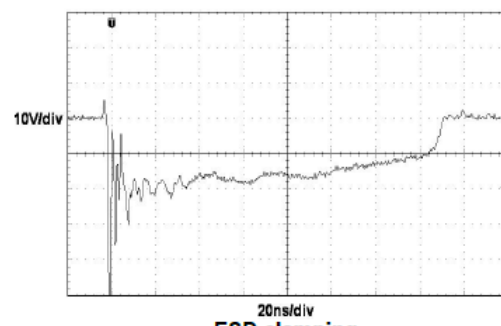

ESD clamping
(-8kV contact discharge per IEC61000-4-2)

Thermal Considerations

symbol	Parameter	Value	Unit
T_J	Operating Junction Temperature Range	-40 to +85	°C
T_S	Storage Temperature Range	-55 to +150	°C

Environmental Characteristics


Testing items	Technical standards
High temperature Reverse Bias Test	Temperature: $150 \pm 3^\circ\text{C}$ Bias= $80\%V_{\text{DRM}}$ Time: 168H
High Temperature Life Test	Temperature: 150°C Time: 168H
High-low Temperature Cycle test	Temperature: From -55°C to 150°C Dwell time: 30min, 100cycles
High Temperature & High Humidity Test	Temperature: 85°C Humidity: 85% Time: 168H
Pressure cooker Test	Temperature: 121°C , 2atm. Humidity: 100% Time: 24H
Resistance of soldering heat	Temperature: $260 \pm 5^\circ\text{C}$ Time of dip soldering: 10s, 3times

Note: The above testing items can be specified by customer's special request

Transient Voltage Suppressor


Version: A1 2023-11-30

Product Dimensions

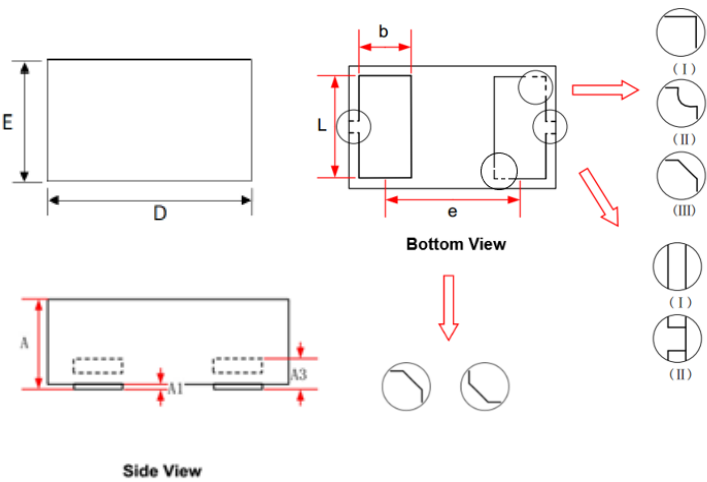

REF	mm	inch
A	0.35~0.55	0.014~0.022
A1	0.00~0.05	0.000~0.002
A3	0.125REF	0.005REF
D	0.95~1.10	0.037~0.043
E	0.55~0.70	0.022~0.028
L	0.45~0.55	0.018~0.022
e	0.65BSC	0.026BSC
b	0.15~0.35	0.006~0.014

Recommended Soldering Pad

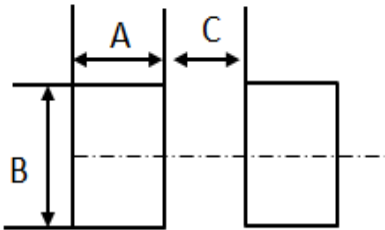

REF	mm	inch
A	0.35	0.014
B	0.60	0.024
C	0.35	0.014

Notes:


This recommended land pattern is for reference purposes only. Please consult your manufacturing group to ensure your PCB design guidelines are met

Transient Voltage Suppressor


Version: A1 2023-11-30

Reflow Profile

Reflow Condition		Pb-Free assembly
Pre Heat	Temperature Min	150°C
	Temperature Max	200°C
	Time (min to max)	60 – 180 secs
Average ramp up rate (Liquid) Tamp (T _L) to peal		3°C/s max
T _S (max) to T _L - Ramp-up Rate		3°C/s max
Reflow	- Temperature (T _L) (Liquid)	217°C
	- Temperature (T _L)	60 – 150 secs
Peak Temperature (T _P)		260+0/-5 °C
Time within 5°C of actual peak Temperature (T _P)		30secs
Ramp-down Rate		6°C/s max
Time 25°C to peak Temperature (T _P)		8 mins max.
Do not exceed		260°C

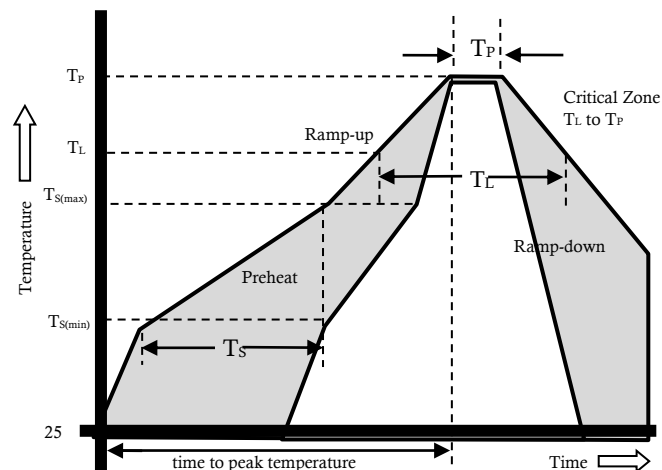

Package Reel Information

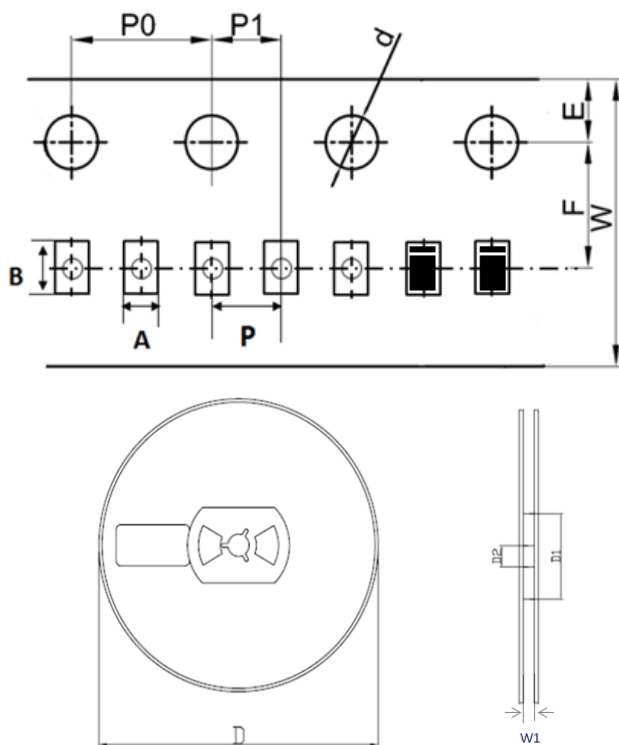

REF	mm	inch
A	0.65+/-0.10	0.026+/-0.004
B	1.20+/-0.1	0.047+/-0.004
d	1.50+/-0.1	0.059+/-0.004
D	178.00+/-2.00	7.008+/-0.079
D1	55.00+/-3.00	2.165+/-0.118
D2	13.00+/-0.50	0.512+/-0.020
E	1.75+/-0.10	0.069+/-0.004
F	3.50+/-0.20	0.138+/-0.008
P	2.00+/-0.20	0.079+/-0.008
P0	4.00+/-0.20	0.157+/-0.008
P1	2.00+/-0.20	0.079+/-0.008
W	8.00+/-0.30	0.315+/-0.012
W1	9.50+/-1.00	0.374+/-0.039

OUTLINE	REEL (PCS)	PER CARTON (PCS)	REEL DIAMETERS (mm)	CARTON SIZE(mm)		
				L	W	H
TAPING	10,000	300,000	178	390	370	220